


FIG. 1

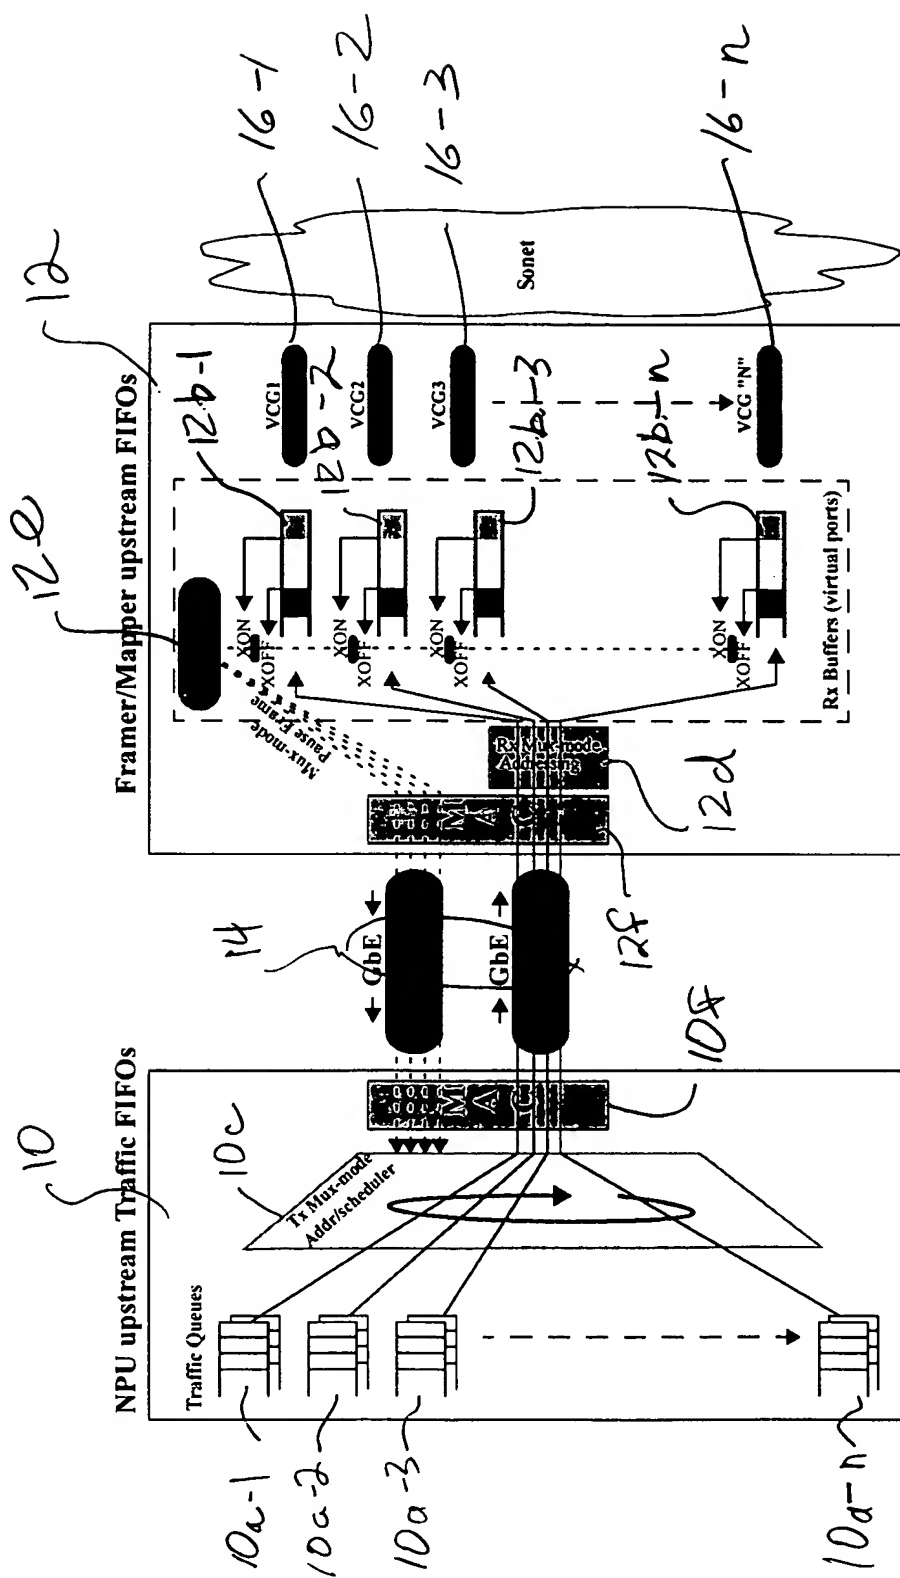

#16, 2




FIG. 3A

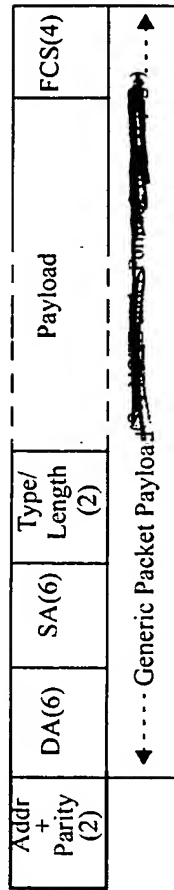


FIG. 3B

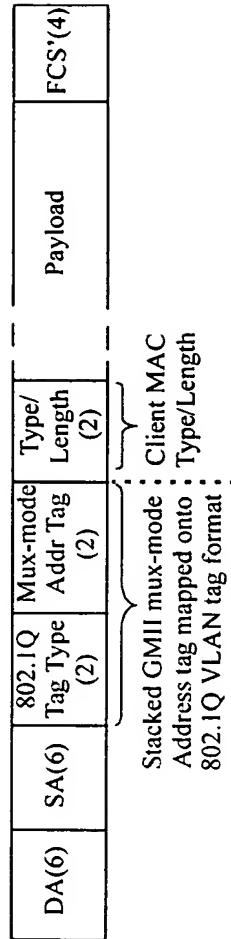


FIG. 3C

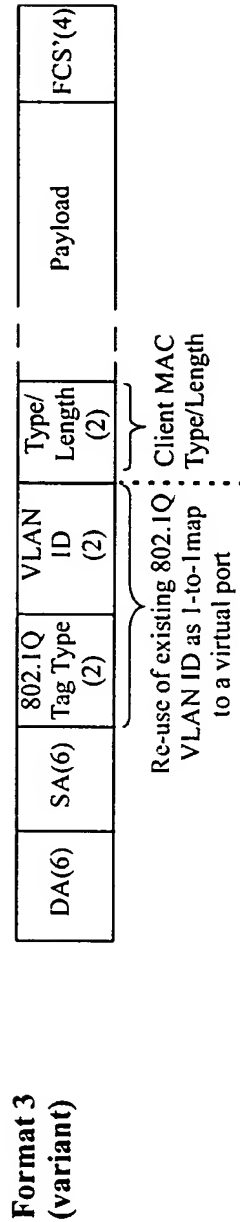


FIG. 3D

## Format 2 (prepended Virtual Port Address)

	15	10	9	8	0
	: : : Not Used : : :	P	:	:	:
		Virtual port number (0-511)			:
		Parity bit (odd)			:

**Set to 1's to avoid aliasing as a MAC Control Frame**

F16.4

**Format 3 (VLAN-style Address mapped on "Tag Control Information")**

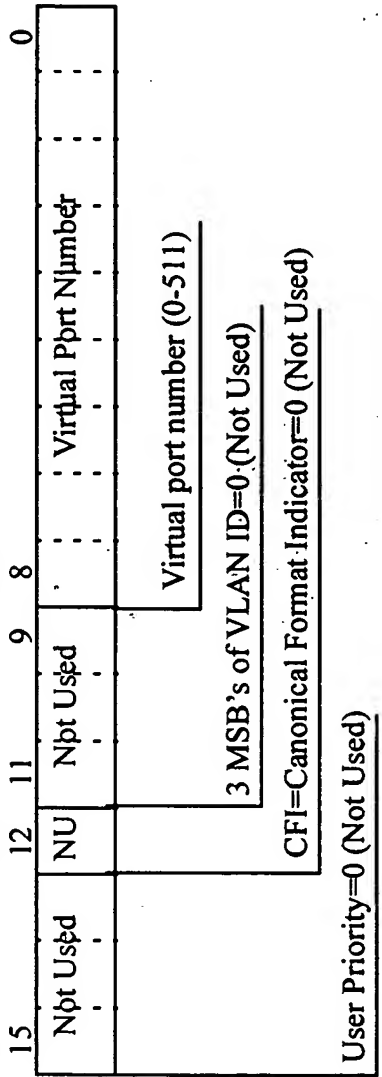


FIG. 5

Format 3 Variant (1-to-1 mapped VLAN ID on "Tag Control Information")

15	12	11	9	8	0
User Priority	CFI	:	:	VLAN ID = Virtual Port Number	:
				Virtual port number (0-511)	
				Canonical Format Indicator (Not Used, Ignore)	
				User Priority (Not Used, Ignore)	

FIG. 6

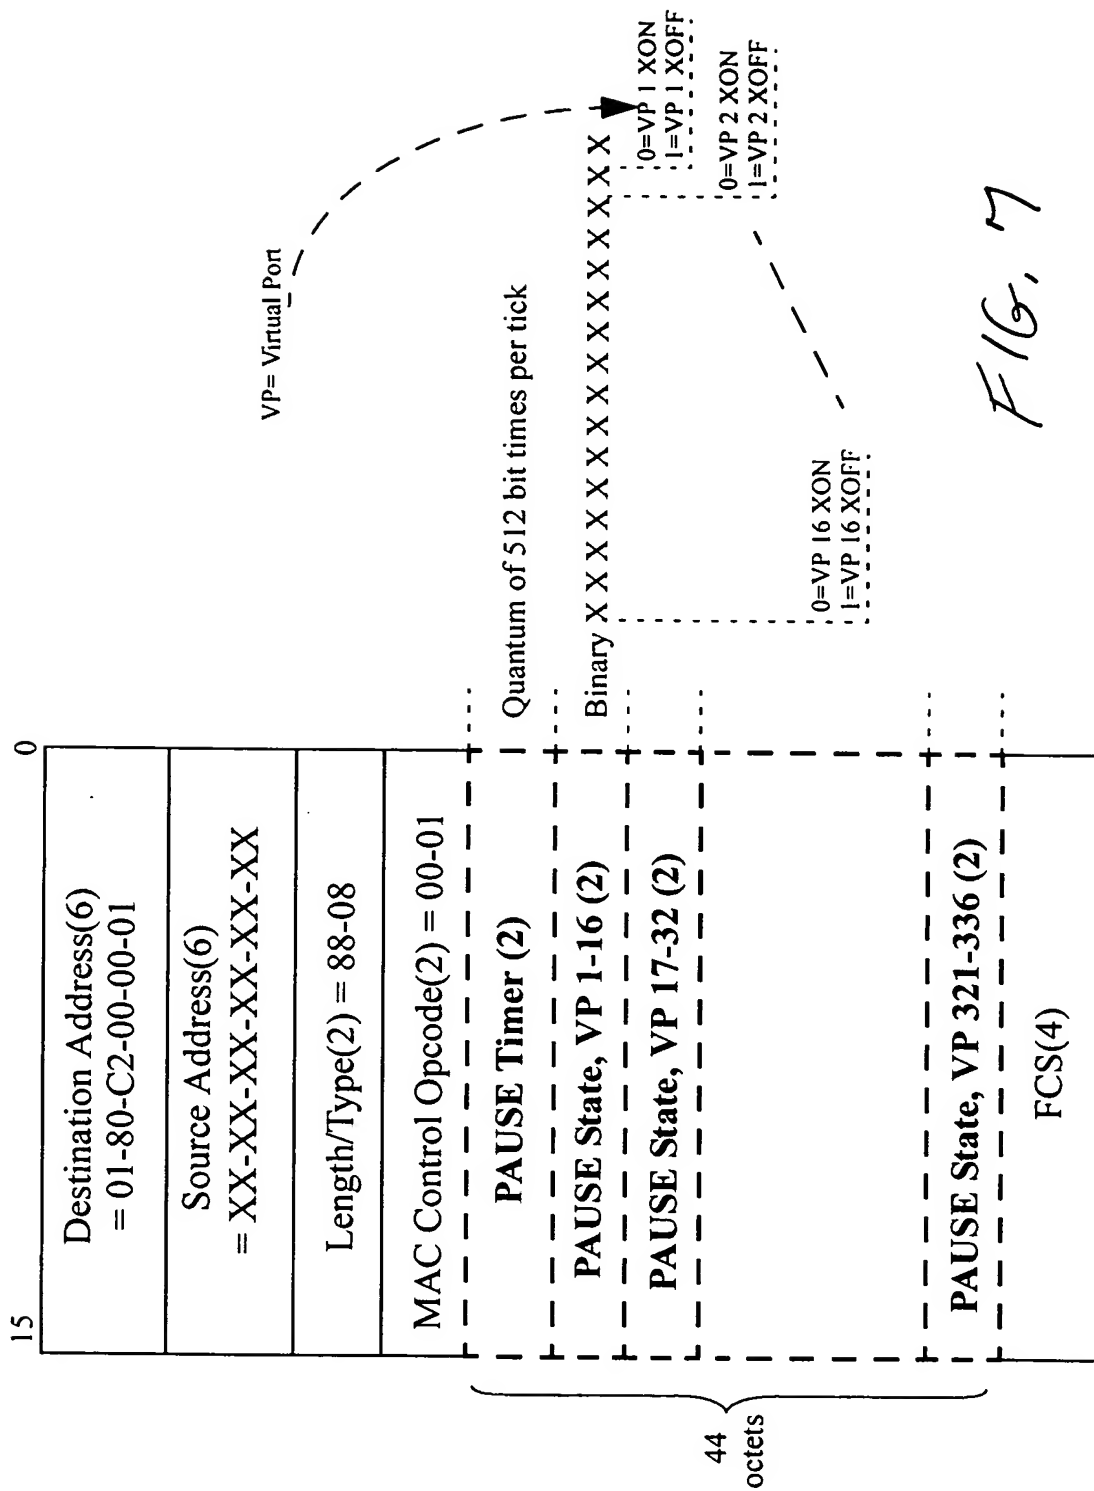


FIG. 7

Layer-2/3 NPU  
MAC client

EoS Framer/Mapper  
MAC client

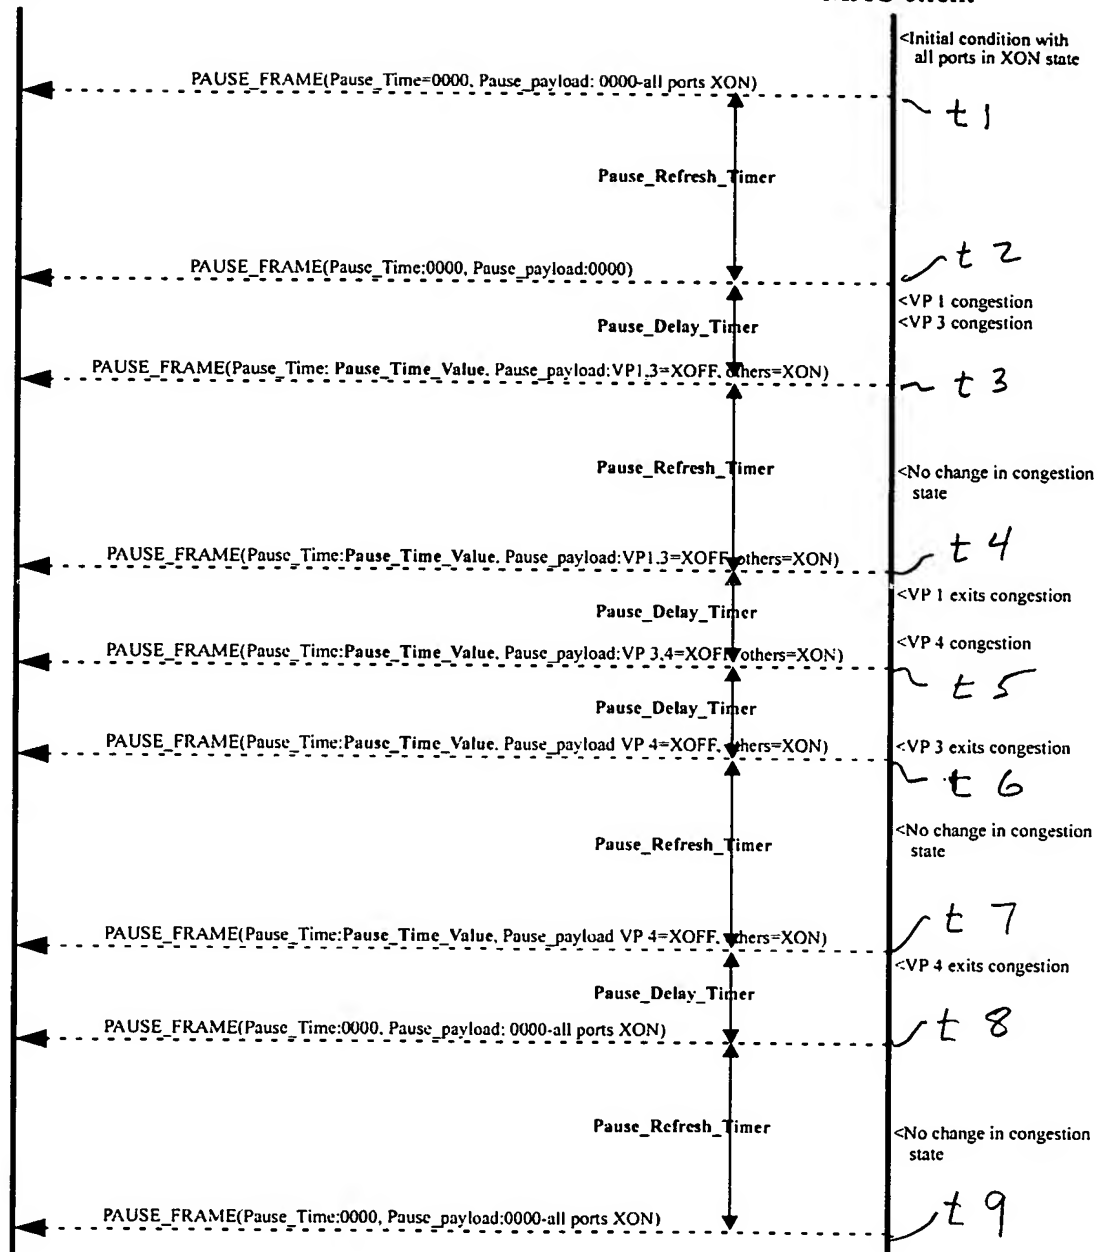


FIG. 8



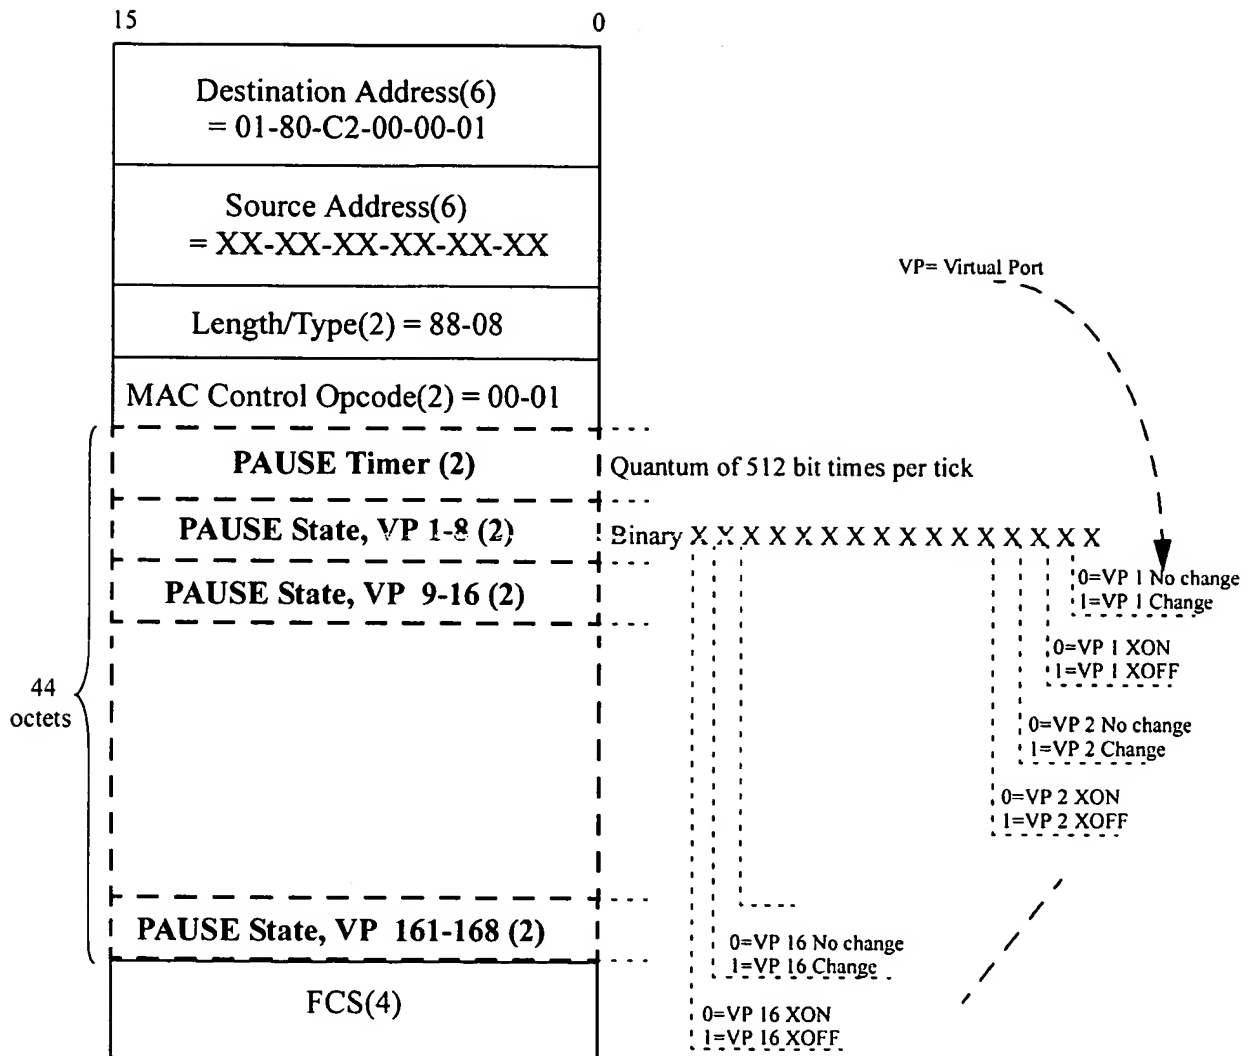


FIG. 9